
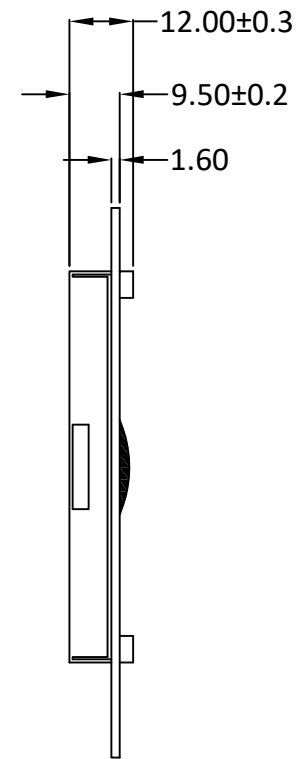


Revised Record

1.0 2012-10-9 New Issue

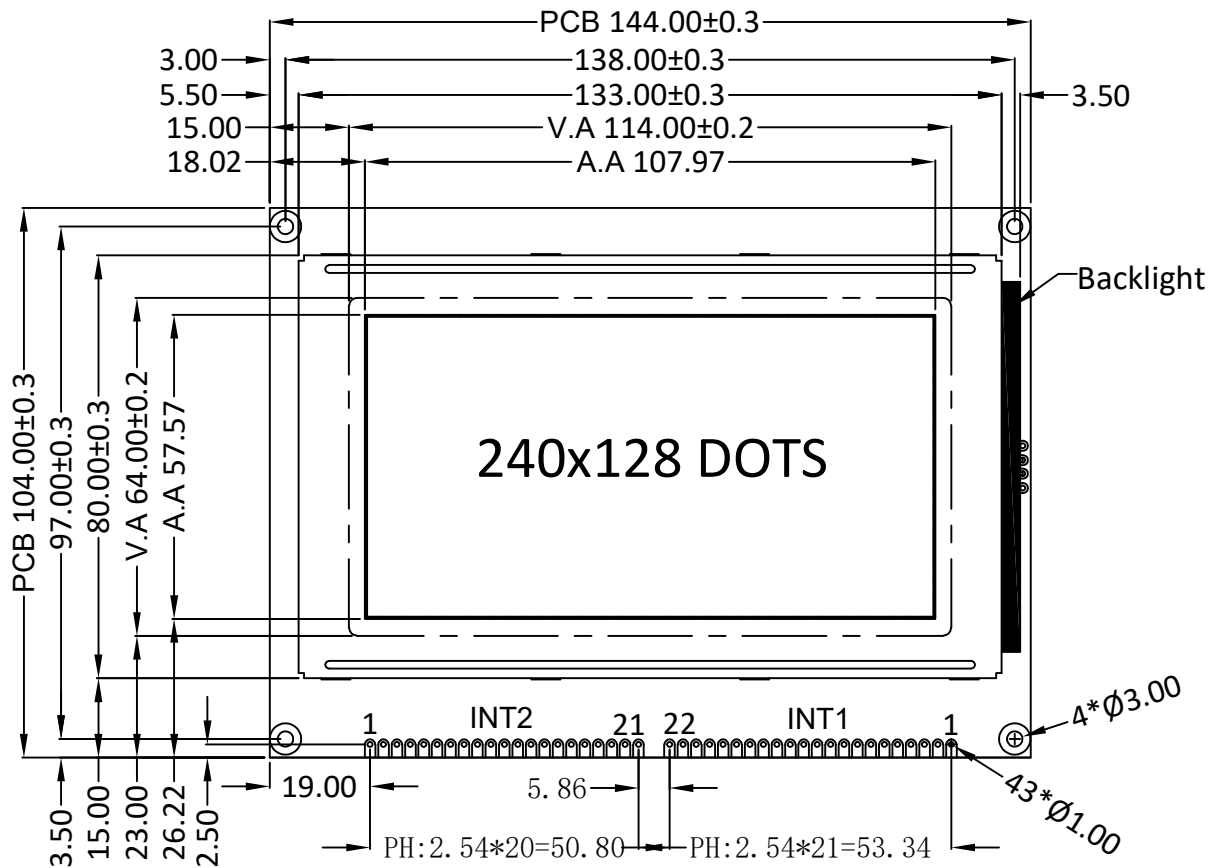


INT1	
PIN	SYMBOL
1	FG
2	VSS
3	VCC(5V)
4	V0
5	WR
6	RD
7	CS
8	C/D
9	N.C
10	RST
11	DB0
12	DB1
13	DB2
14	DB3
15	DB4
16	DB5
17	DB6
18	DB7
19	FS
20	VEE
21	LED+(5V)
22	LED-

INT2	
PIN	SYMBOL
1	FG
2	VSS
3	VCC(5V)
4	V0
5	WR
6	RD
7	CS
8	C/D
9	RST
10	DB0
11	DB1
12	DB2
13	DB3
14	DB4
15	DB5
16	DB6
17	DB7
18	FS
19	VEE
20	LED+(5V)
21	LED-

SPECIFICATIONS:

- 1. DISPLAY TYPE: FSTN / POSITIVE(GRAY) / TRANSMISSIVE
- 2. DRIVE IC: RA6963 + LY62256
- 3. CONNECTOR: ZEBRA
- 4. OPERATING VOLTAGE: VOP = 18 V, VDD = 5.0V
- 5. OPERATING TEMPERATURE: -20 ~ 70°C
- 6. STORAGE TEMPERATURE: -30 ~ 80°C
- 7. DRIVE MODE: 1/128 DUTY, 1/12 BIAS
- 8. VIEWING ANGLE: 6 O'CLOCK
- 9. BACKLIGHT: WHITE LED, I = 120mA
- 10. CUSTOMER PART NO.: BOCEN STANDARD PRODUCT



<b>BOCEN DISPLAY TECHNOLOGY CO., LTD.</b>		
DESIGNED BY: Shawn	<b>BB240128-02</b>	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 1
APPROVED BY: Rio		UNIT: mm
Website: <a href="http://www.bocentech.com">http://www.bocentech.com</a>		DATE: 2012-10-9