
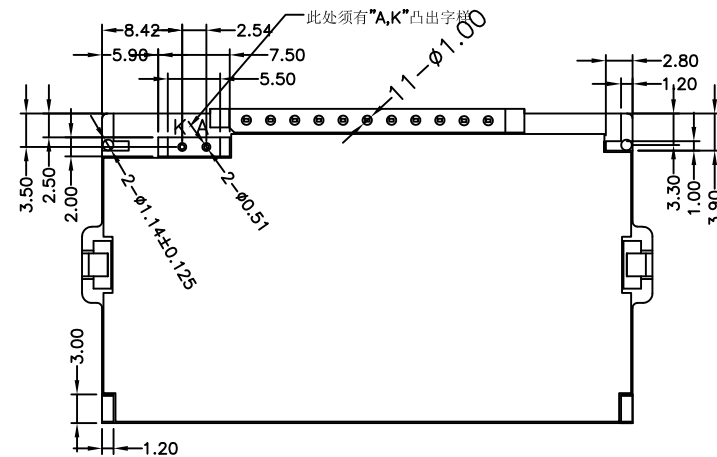
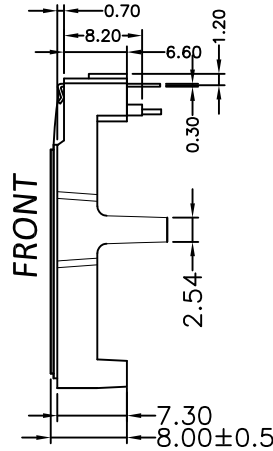
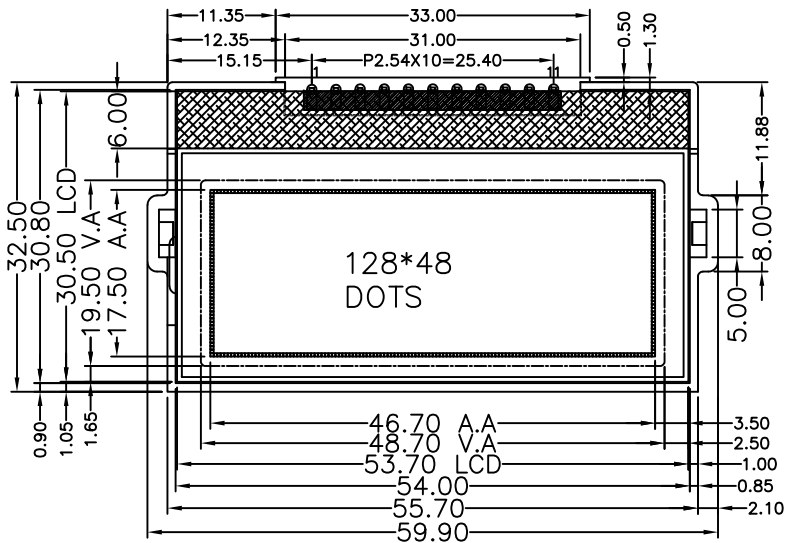




Revised Record	1.0	2018-08-10	New Issue
----------------	-----	------------	-----------

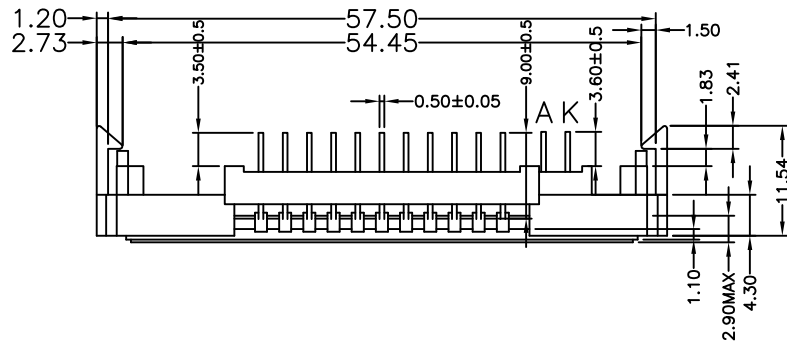

胶框材料为 尼龙ASVO

PIN	SYMBOL
1	CS0
2	/RES
3	SCK
4	SDI
5	VDD
6	VSS
7	VB1+
8	VB1-
9	VB0-
10	VB0+
11	VLCD

SPECIFICATIONS:

- | | |
|---------------------------|---|
| 1. DISPLAY TYPE: | FSTN / POSITIVE/ TRANSMISSIVE |
| 2. DRIVE IC: | UC1601X |
| 3. OPERATING VOLTAGE: | V _{lcd} =8.8V; V _{dd} =3.3V |
| 4. OPERATING TEMPERATURE: | -20°C ~ +70°C |
| 5. STORAGE TEMPERATURE: | -30°C ~ +80°C |
| 6. DRIVE MODE: | 1/49DUTY, 1/8BIAS |
| 7. VIEWING ANGLE: | 12 O'CLOCK |
| 8. BACKLIGHT: | 1PCS WHITE LED, IF=15mA; VF=3.2V |
| 9. CUSTOMER PART NO.: | BOCEN STANDARD PRODUCT |


BOCEN DISPLAY TECHNOLOGY CO., LTD.

DESIGNED BY: Shawn

BG12848-09

VERSION: 1.0

CHECKED BY: William



NO.: 1 OF 3

APPROVED BY: Rio

UNIT: mm

Website: <http://www.bocentech.com>

DATE: 2018-08-10