

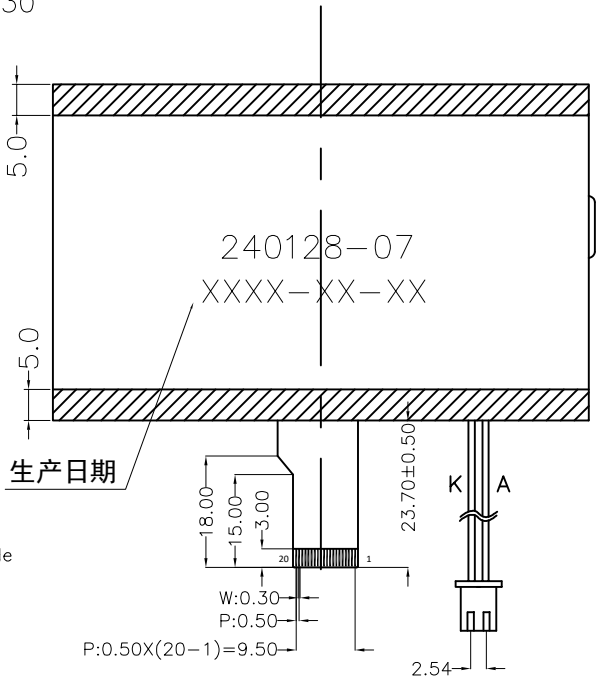
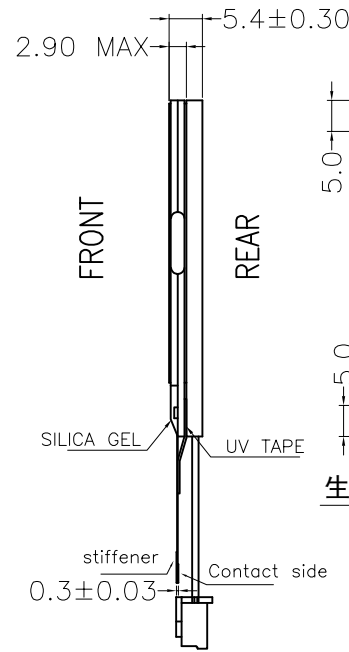
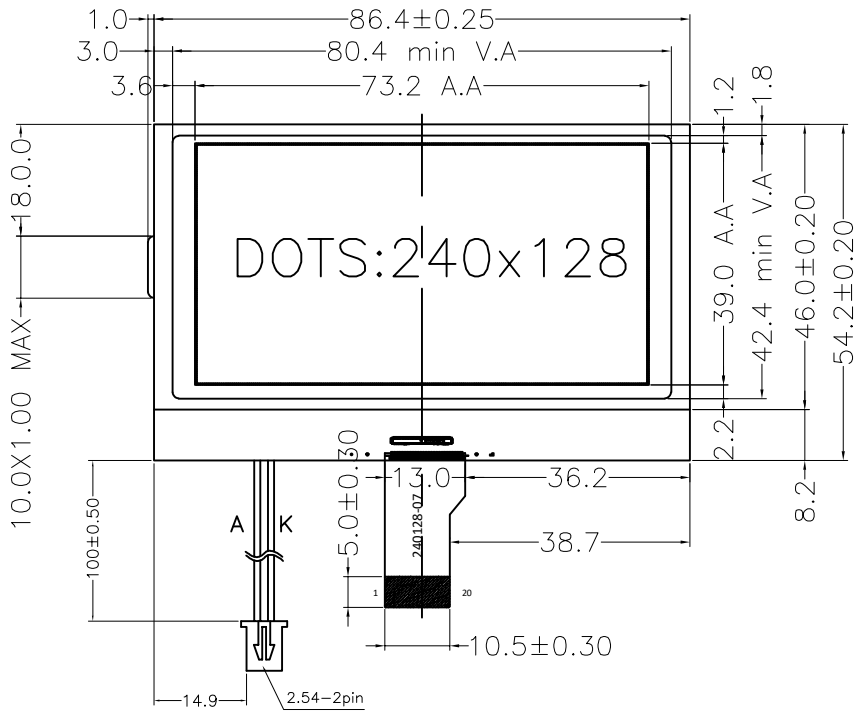


Version	1.0	2024-05-24	New Issue						

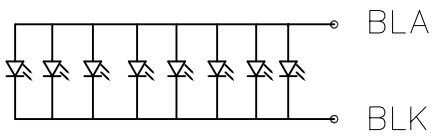


PIN	NAME
1	VB0+
2	VB1+
3	VB1-
4	VB0-
5	VA0+
6	VA1+
7	VA1-
8	VA0-
9	VLCD
10	VDD
11	VSS
12	POR-DIS
13	ID
14	VSS
15	CD
16	CS0
17	RST
18	SCL
19	VSS
20	SDA



SPECIFICATIONS:

- 1. DISPLAY TYPE: FSTN / POSITIVE / TRANSFLECTIVE
- 2. DRIVE IC: UC1638C
- 3. OPERATING VOLTAGE: Vdd=3.3V; Vlcd=13.5V
- 4. OPERATING TEMPERATURE: -20°C ~ +70°C
- 5. STORAGE TEMPERATURE: -30°C ~+ 80°C
- 6. DRIVE MODE: 1/128 DUTY, 1/12 BIAS
- 7. VIEWING ANGLE: 6 O'CLOCK
- 8. BACKLIGHT: 8pcs WHITE LED 3.0V,120mA
- 9. CUSTOMER PART NO.: BOCEN STANDARD PRODUCT

BOCEN DISPLAY TECHNOLOGY CO., LTD.		
DESIGNED BY: Sylar	BG240128-07	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 1
APPROVED BY: Rio		UNIT: mm
Website: http://www.bocentech.com		DATE: 2024-05-24