



PIN	SYMBOL
1	CSB
2	RST
3	A0
4	SCL
5	SDA
6	VDD
7	VSS
8	V0
9	XV0
10	VG

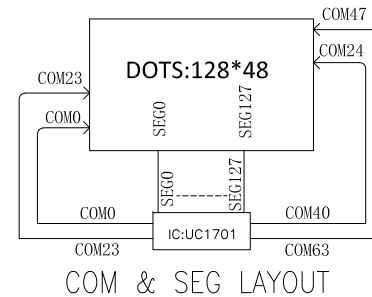

BackLight Circuit

**SPECIFICATIONS:**

- |                           |                                 |
|---------------------------|---------------------------------|
| 1. DISPLAY TYPE:          | FSTN / POSITIVE/ TRANSMISSIVE   |
| 2. DRIVE IC:              | UC1701C                         |
| 3. OPERATING VOLTAGE:     | Vlcd=7.5V; Vdd=3.0V             |
| 4. OPERATING TEMPERATURE: | -20°C ~ +70°C                   |
| 5. STORAGE TEMPERATURE:   | -30°C ~+80°C                    |
| 6. DRIVE MODE:            | 1/49DUTY, 1/8BIAS               |
| 7. VIEWING ANGLE:         | 6 O'CLOCK                       |
| 8. BACKLIGHT:             | 2PCS BLUE LED, IF=30mA; VF=3.0V |
| 9. CUSTOMER PART NO.:     | BOCEN STANDARD PRODUCT          |

**BOCEN DISPLAY TECHNOLOGY CO., LTD.**

DESIGNED BY: Shawn	<b>BG12848-08</b>	VERSION: 1.0
CHECKED BY: William		NO.: 1 OF 1
APPROVED BY: Rio		UNIT: mm
Website: <a href="http://www.bocentech.com">http://www.bocentech.com</a>		DATE: 2018-11-30